


GTS Axles

Drum Braked Trailer Axles

Designed for Australian conditions

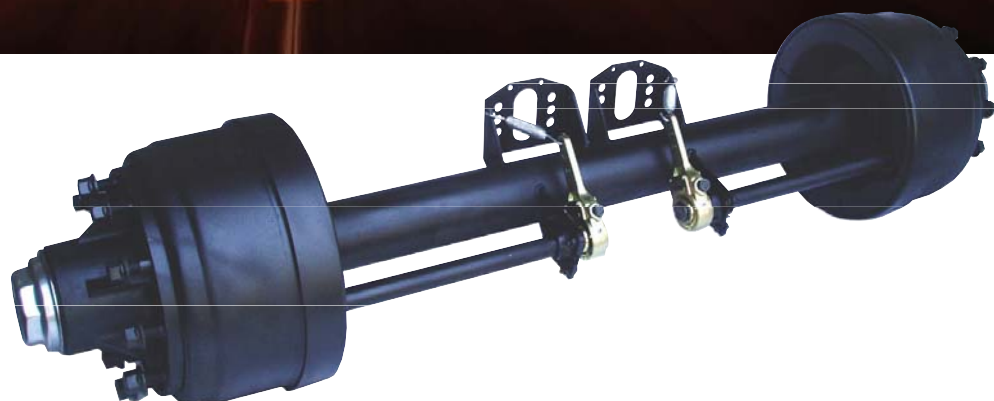

GH SERIES

GTS
Axles & Suspensions
'QUALITY HYDRAULIC & TRANSPORT EQUIPMENT'



GH SERIES Model Specifications:

MODEL	WHEEL FIXING	TRACK	BEAM	CAPACITY	BRAKE	DESIGN
GHN11310-70-74	10 stud x 225mm pcd	1,880mm	127mm x 18mm	11,500kg	310mm x 190mm	Out board
GHN11310-70-77	10 stud x 225mm pcd	1,955mm	127mm x 18mm	11,500kg	310mm x 190mm	Out board
GHN11310-03-74	3 spoke	1,880mm	127mm x 18mm	11,500kg	310mm x 190mm	Out board
GHN11310-03-77	3 spoke	1,955mm	127mm x 18mm	11,500kg	310mm x 190mm	Out board
GHN11420-50-73	10 stud x 285mm pcd	1,854mm	127mm x 18mm	11,500kg	420mm x 180mm	Out board
GHN11420-10-73	10 stud x 335mm pcd	1,854mm	127mm x 18mm	11,500kg	420mm x 180mm	Out board
GHN11420-05-73	5 spoke	1,854mm	127mm x 18mm	11,500kg	420mm x 180mm	In board



- Quality, industry standard GP bearings
- National seals
- Standard GP linings
- Backing plate
- 1 1/2" standard cam
- ABS ready

Options:

- Open or enclosed cams
- Steel or alloy wheel fixings

Features:

- Robust and dependable technology provides uncompromised performance and endurance
- Various options tailored to suit your needs
- 'S' cam brakes fitted with quick release brake shoes
- Brake linings radius ground for maximum lining to drum contact from first brake application
- Comprehensive support throughout Australia

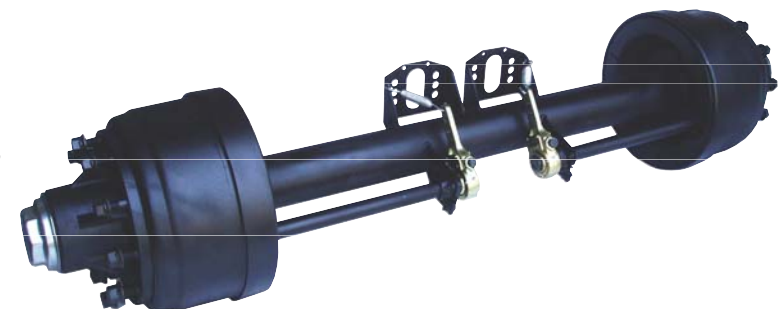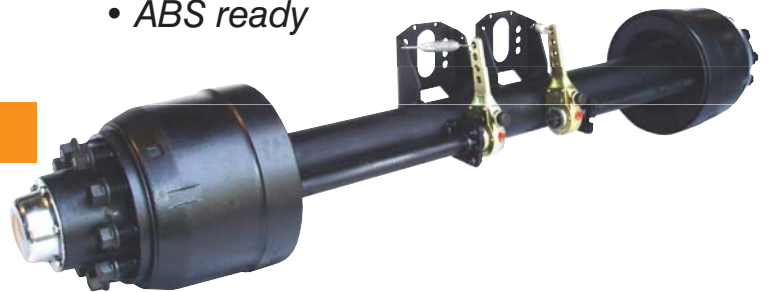

Ph: 1300 300 375
AUSTRALIA WIDE
www.goughtransport.com.au

Gough Transport Solutions

'QUALITY HYDRAULIC & TRANSPORT EQUIPMENT'

